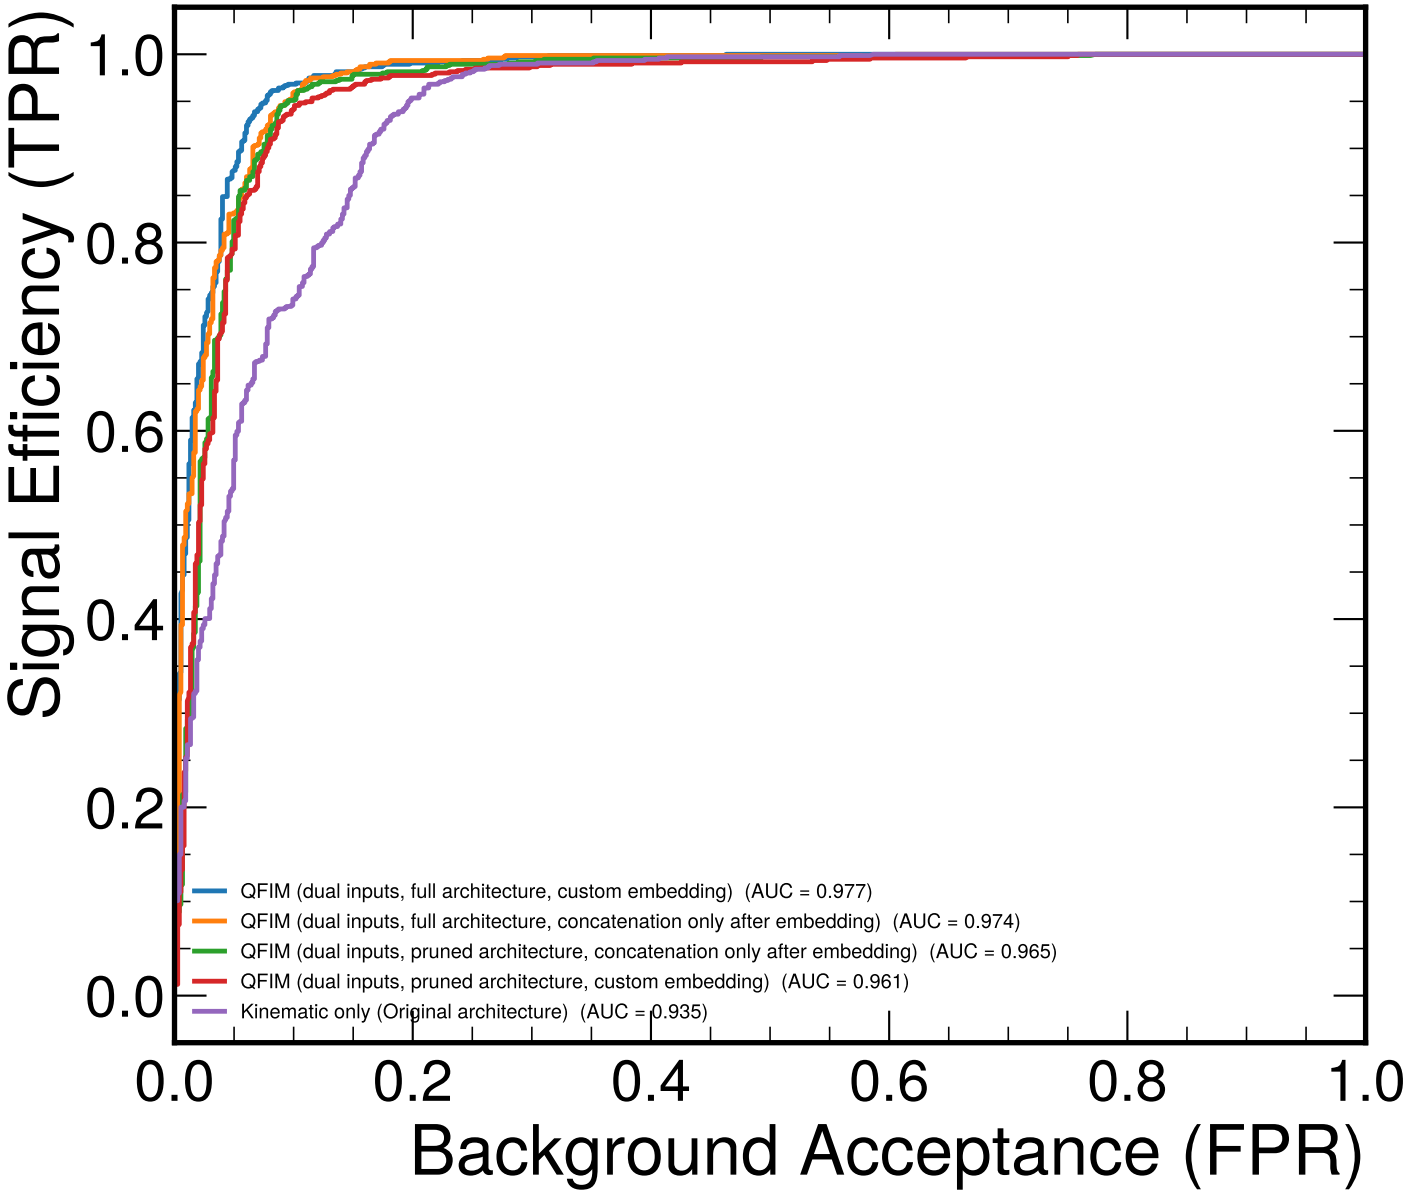
Signal Efficiency (TPR)
Background Acceptance (FPR)
0.0
0.2
0.4
0.6
0.8
1.0
QFIM (dual inputs, full architecture, custom embedding) (AUC = 0.977)
QFIM (dual inputs, full architecture, concatenation only after embedding) (AUC = 0.974)
QFIM (dual inputs, pruned architecture, concatenation only after embedding) (AUC = 0.965)
QFIM (dual inputs, pruned architecture, custom embedding) (AUC = 0.961)
Kinematic only (Original architecture) (AUC = 0.935)